

HEATING AND CHEMICALS

Contents of Chapter 5:

Drain Cleaning Chemicals		5-02
Solder And Solder Flux		5-03
Pipe Joint Compounds		5-04
Key Grease & Lubricants		5-05
Screws & Boiler Plugs		5-06
Hand Cleaners		5-06
Packing and Gasket Material		5-06
Gorilla Brand Products		5-08



HEATING AND CHEMICALS

DRAIN CLEANING CHEMICALS

LIQUID WHOOSH

- 93% Sulfuric Acid -- Dissolves hair, scale, food particles, mineral deposits, and other organic matter. Can be used in sink traps, drains, toilets, urinals and all waste lines.
- Concentrated sulfuric acid base with corrosion inhibitor and activating agents.

Dept. of Trans. Hazardous Mat'l Designation: UN1830

ORIGINAL VERSION:

- | | |
|----------------|-----------------------|
| CAT NO. | DESCRIPTION: |
| 433-001 | 1 Qt. (32 oz.) |
| 433-501 | MSDS Sheet for Whoosh |
- Packaged 12 Plastic Bottles to a case;
Sold in Full Cases Only

WHOOSH "SINGLE SHOT" (New odor block version!)

- | | |
|----------------|-------------------------------------|
| CAT NO. | DESCRIPTION: |
| 433-002 | 1 Pint (16 oz.) |
| 433-502 | MSDS Sheet for Whoosh "Single Shot" |
- Packaged 12 Plastic Bottles to a case; *Sold in Full Cases Only*



LIQUID DRAINITE

- Odorless - Ready to Use.
- Heavier than water, so "Liquid Drainite" goes right to the clog.
- Harmless to porcelain, drain pipe, septic tanks, cesspools.
- Liquefies and dissolves hair, grease, fats, scum, lint, coffee grounds, tobacco, vegetable peelings and organic wastes.

- | | |
|----------------|--------------------------------|
| CAT NO. | DESCRIPTION: |
| 431-003 | 1 Qt. (32 oz.) |
| 431-503 | MSDS Sheet for Liquid Drainite |
- Packaged 12 Plastic Jugs to a case; *Sold in Full Cases Only*



POWDERED DRAINITE™

Powdered version of our popular Drainite™. Safer to use and store than liquid versions.

- | | |
|----------------|----------------------------------|
| CAT NO. | DESCRIPTION: |
| 431-001 | 12 oz. |
| 431-501 | MSDS Sheet for Powdered Drainite |
- This product can be sold individually.*



BLOW OUT - NON ACID DRAIN CLEANER

Blow Out is the strongest non-acid liquid drain cleaner and opener on the market. Industrial strength yet environmentally safe.

- Pours through standing water to free drains fast.
- Dissolves hair, grease, soap and other organic matter.
- Will not affect the bacterial action in cesspools or septic tanks.
- Stronger than household drain cleaners and safer than sulfuric acid

- | | |
|----------------|--------------------------|
| CAT NO. | DESCRIPTION: |
| 434-002 | 1 Qt. (32 oz.) |
| 434-502 | MSDS Sheet for Blow Out! |
- This product can be sold individually*



POWERMAX ENZYMATIC DRAIN CLEANER

- Quart sized, pkgd. 12 per case
- Mint odor
- 100% natural, SAFE, and biodegradable
- Breaks up uric salts in urinals

- | | |
|----------------|-------------------------|
| CAT NO. | DESCRIPTION: |
| 434-001 | 1 Qt. (32 oz.) |
| 434-006 | 1 Gallon |
| 434-501 | MSDS Sheet for PowerMax |
- This product can be sold individually*



ROOT KILLER

ROOT AWAY (Formerly OI' faithful Root Destroyer)

Simply flush these pre-measured water soluble packets, containing chemical crystals, to eliminate roots in piping systems. Use periodically to prevent the accumulation of roots. Root Away is completely harmless to drainage lines and sewage disposal systems and it won't harm trees or plants. E.P.A. registered.

- | | |
|----------------|---------------------|
| CAT NO. | DESCRIPTION: |
| 422-002 | 2 lbs. |
| 422-502 | MSDS Sheet |
- Packaged 12 Plastic Jugs to a case. *Sold in Full Cases Only*



TUB & TILE CAULKING

DAP® PHENOSEAL® TUB & TILE CAULK

- Lifetime guarantee - will not stain or crack
- Mildew resistant, good for exterior as well as interior use
- Paint over within 24 hours with latex or oil base paints
- Contains silicone for superior adhesion to most surfaces
- 72 Hour cure time, brilliant white color
- 100% Acrylic resins, remains flexible
- Freeze/thaw stability
- Meets A.S.T.M. C834-F6

- | | |
|----------------|--------------------------------|
| CAT NO. | DESCRIPTION: |
| 845-002 | White - 10.1 oz. cartridge |
| 845-502 | MSDS Sheet for Phenoseal Caulk |



Buy 12 of the 845-002, and get a FREE Caulking Gun
845-003 Caulking Gun

POLYSEAMSEAL® TUB & TILE CAULK

- Water based and mildew resistant - For use in high humidity areas
- Will not stain or crack

- | | |
|----------------|-----------------------------------|
| CAT NO. | DESCRIPTION: |
| 845-005 | Clear Caulk in 6 oz. squeeze tube |
| 845-006 | White Caulk in 6 oz. squeeze tube |
| 845-502 | MSDS Sheet for Vinyl Caulk |



GE® KITCHEN AND BATH SILICONE

- GE Silicone I kitchen & bath offers excellent performance in most kitchen and bath applications, adhering to tile, porcelain, and fiberglass.
- Provides a mildew-resistant, watertight seal that remains flexible.
- For: Sinks, countertops, showers, tubs, tile, and fixtures.

- | | |
|----------------|------------------------------|
| CAT NO. | DESCRIPTION: |
| 845-010 | Clear - 10.1 oz. cartridge |
| 845-011 | White - 10.1 oz. cartridge |
| 845-510 | MSDS Sheet for GE Silicone I |



DAP® 100% SILICONE RUBBER SEALANT & KWIK-SEAL TUB & TILE CAULK

- Water tight for indoor or outdoor usage
- Long lasting with minimal shrinkage


- | | |
|----------------|--------------------------------------|
| CAT NO. | DESCRIPTION: |
| 845-007 | Clear Silicone, 2.8 oz. squeeze tube |
| 845-008 | White Silicone, 2.8 oz. squeeze tube |
| 846-001 | 18001 Kwik Seal, white 5.5 oz tube |
| 846-008 | 18008 Kwik Seal, clear 5.5 oz tube |



DAP® PLASTER OF PARIS

- For general wall and ceiling repair
- Sets in 30 minutes
- For interior use only
- No shrinkage

- | | |
|----------------|---------------------|
| CAT NO. | DESCRIPTION: |
| 845-009 | 4.4 lb box |

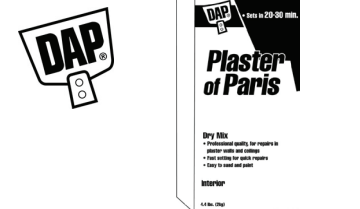

FROST KING® ROPE CAULK

- A high quality caulking compound which will not harden, crack, chip or peel and can be used either indoors or outdoors. It may also be painted.

- | | |
|----------------|---------------------|
| CAT NO. | DESCRIPTION: |
| 845-016 | 30' long rope caulk |



Notes:




HEATING AND CHEMICALS

SOLDER FLUX

CREST/GOOD SELF-CLEANING SOLDER FLUX

Crest/Good Self-Cleaning Solder Flux is more economical because it eliminates cleaning time - no burnishing of the metal necessary. Will absolutely not turn green. Cleaning action of Flux stops when heat is removed. Note: contains Zinc Chloride, a hazardous material.

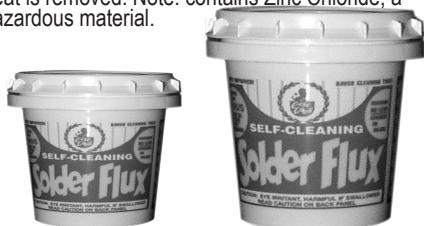

CAT NO.	SIZE:	PER CASE:
661-004	4 oz.	24 or 48
661-002	1/2 lb.	24 or 48
661-003	1 lb.	24
661-502	MSDS Sheet For Solder Flux	

WATER SOLUBLE SOLDER FLUX



CAT NO.	DESCRIPTION:
665-002	8 oz.
665-502	MSDS Sheet for Water Sol Flux

SOLDERS

100% LEAD FREE SOLDER

Econobrite is a superior solder because it contains only tin, copper and silver. Econobrite is a non-toxic solder that can be safely used in potable water lines.



CAT NO.	DESCRIPTION
662-001	1 lb. spool

95/5 SOLDER

Contains 95% tin and 5% silver. Meets ASTM B-32 Certified to ANSI/NSF 61.



CAT NO.	DESCRIPTION
662-002	1 lb. spool

50/50 SOLDER

Used for general purpose soldering. For use only in certain states.



CAT NO.	DESCRIPTION:
663-001	1 lb. spool

SILVABRITE 100

Lead & antimony-free, non-toxic solder. Low melting point & wide melting range for excellent flow and control.



CAT NO.	DESCRIPTION:
662-003	1 lb. spool

SILVERFLOW SF-1 BRAZING ROD

For the repair, maintenance and joining of copper and copper alloys.



CAT NO.	DESCRIPTION:
662-004	1 lb. package

LIME DISSOLVERS

LIME DISSOLVER PLUS!

Dissolves lime, scale, uric salts, and mineral deposits. Also cleans concrete, clears lime clogged hot water pipes, and boiler coils. Safer to use, safer to store, and safer to ship.



Contains phosphoric & citric acids.

CAT NO.	DESCRIPTION:
416-003	1 quart container
416-503	MSDS Sheet
Packaged 12 Plastic Bottles to a case;	
Sold in Full Cases Only	

BRUSHES

CEMENT OR PASTE BRUSH



Bristles set in rubber and can't pull out. Sturdy wood handle. A fast worker that fills the pipe thread in two swipes.

CAT NO.	NO.	SIZE	LGTH
641 I 001	2	1/2"	8"

ACID BRUSHES

The ol' stand by. Hollow aluminum handle. Economically priced.



CAT NO.	SIZE	
642 I 001	1/4"	Small
642 I 002	3/8"	Medium
642 I 004	1"	Extra Lg.

COPPER CLEANING TOOL

For cleaning tubes, pipes & fittings. Reusable, just replace worn parts with replacement kit.



CAT NO.	DESCRIPTION
644 I 010	Cleaning Tool
644 I 011	Replacement brush set

Crest / Good carries a complete line of copper fittings.

See page 7-22 & 23, or ask your salesperson for a full list.

CUTTING OIL

DARK CUTTING OIL

Clear, Active Dark Sulfurized Cutting Oil



CAT NO.	SIZE:
492-016	1 Gal. Bottle
492-516	MSDS Sheet
Packaged 6 to a case.	

**NO MORE BURN MARKS!
USE # 5911705 SOLDER BLANKET**
(Details on page 6-18)

BOILER CHEMICALS

COPPER WELD

For sealing leaks in copper lines as used in base-board and radiant heating (a liquid boiler seal.) Crest/Good copper weld has tremendous trade acceptance because it seals all leaks in every type of hot water heating system where copper tubing is used. Seals sand holes, leaks in copper sweat fittings and tubing.



To use, merely pour into any opening or pump through boiler drain. Keep circulator running until all leaks are sealed. Leaks seal fast - permanently. Use on new installations as insurance against leaks developing. Use on old systems as a permanent or emergency repair. One can is sufficient for each 40 gallons of water in the system.

CAT NO.	DESCRIPTION:
414-001	1 Pint
414-501	MSDS Sheet for Copper Weld
Packaged 12 Plastic Bottles to a case;	
Sold in Full Cases Only	

COPPER LOCK

Copper Lock is revolutionizing the way pipes are soldered. Simply apply it inside the connector, fit in the pipe and within seconds a permanent leakproof seal will occur. Pressure may be applied after 2 minutes. Can withstand pressures at 10,000 PSI flow and 500 PSI contained. Copper Lock can also with stand temperatures from -60°F to +300°F.



CAT NO.	DESCRIPTION:
644-800	2 oz. (60 ml.)
644-801	10 ml.
644-502	MSDS Sheet for Copper Lock

DEGREASER

A powerful non-acid, non caustic liquid concentrate for cleaning fat, grease, slime, and other waste products. Very effective for controlling odors. Improves the efficiency of septic tanks and drain fields, eliminates cesspool overflows, and frees clogged grease traps. Contains exclusive Sluicex®



CAT NO.	DESCRIPTION:
432-002	1 Quart
432-501	MSDS Sheet
Packaged 12 Plastic Bottles/case;	
Sold in Full Cases Only	

LIQUILOCK GEL

LIQUILOCK GEL

Safe, non-toxic gel designed to solidify water in the toilet bowl during removal of bowl from floor.



Once the toilet is reinstalled, the gel re-liquefies and can be flushed down the drain.

Use 1 pack for 1.6 gpf bowls,

CAT NO.	DESCRIPTION:
422-004	.6 oz pack
422-504	MSDS Sheet for Liquilock



HEATING AND CHEMICALS

PIPE JOINT COMPOUNDS

"BIG BEN" JOINT COMPOUND

"Big Ben" compound seals & lubricates. Especially good for brass and all threaded connections on gas, air, water, steam lines, etc.



Contains built-in wicking and is lead free. Thixotropic, won't spill or dry out and retains its consistency indefinitely. Gray colored paste withstands temperatures from -120°F. to +600°F.; and pressures to 10,000 psi.

CAT NO. DESCRIPTION:
655-002 1/2 Pint
655-501 MSDS Sheet for Pipe Dope

JIFFY SEAL PTFE PASTE

(Heavy Duty Thread Compound) A thread sealant for most solvents, acids, alkalis and gases. Resists temperatures up to 500° or as low as -200° F. This PTFE thread compound is effective on steam, salt water, fuels & refrigerants. Non-staining, non-toxic, non-conducting & non-corrosive. -200°F. to +500°F up to 10,000 psi.



CAT NO. DESCRIPTION:
654 T 102 1/2 Pint w/Dauber
654 T 502 MSDS Sheet for PTFE Paste
Packaged 12 to a case

BLUE BLOCK

BLOCK is an all purpose, high performance pipe joint and gasket sealing compound for use on metals including Aluminum, Black Iron, Brass, Copper, Stainless Steel, Galvanized Steel and on Plastics including PVC and CPVC. Block sets up quickly and dries to form a very tough, yet flexible seal which will not harden, crack, crumble or shrink. Provides leak-proof resistance to high pressure, temperature, expansion, contraction and extreme vibration. Contains no lead.



CAT NO. DESCRIPTION:
656H009 1/2 pint
656H006 1 pint
656H509 MSDS Sheet for Blue Block

PIPE JOINT CEMENT

Powdered Formula.

Mix with Boiled Lindseed Oil

The industry's finest pipe joint compound, in a powdered form.



CAT NO. DESCRIPTION:
652 Y 002 50 lb. Pail
652 Y 004 250 lb. Drum
652 Y 005 500 lb. Drum
652 Y 502 MSDS Sheet for Powder

Drums shipped via trucking line. Extra shipping fee applies.



DUCK BUTTER is a water soluble pipe lubricant for joining pipe and fittings with rubber, synthetic rubber or plastic gaskets. **NON-TOXIC.** For use on PW, DWV, & sewer systems. Adheres to wet and dry surfaces. Useable from 10° to 120 °F. Does not support bacterial growth. NSF Listed.



CAT NO. DESCRIPTION:
656H005 2 Pounds

PRO DOPE is a versatile thread sealant for use on black iron, galvanized steel, copper, brass and aluminum pipe and fittings. Use on lines carrying natural gas, air, steam, hydronic heating, ammonia, brine, diluted acids & sprinkler systems. Pro Dope will not drip, is lead free, non-toxic and won't spill. It is non-separating and provides a tight, positive, leak-free seal.



Pro Dope contains no lead. **Not for use on plastic threads.**

CAT NO. DESCRIPTION:
656H001 1/2 pint
656H002 1 pint

MEGALOC & REAL-TUFF

MEGALOC is a multi-purpose thread sealant for use on metals including steel, stainless steel, brass, copper, aluminum, and on plastics including PVC, CPVC and ABS. Leak-free joints can be tested and put into service at once. MEGALOC wipes clean from hands and tools with a dry rag, is odor-free, grit-free and will not separate or settle. MEGALOC does not harden, crack or become brittle; joints



CAT NO. DESCRIPTION:
656H008 1/2 pint
656H007 1 pint
656H508 MSDS Sheet for Megaloc

REAL-TUFF is a multi-purpose thread sealant formulated with the highest percentage PTFE content on the market. PTFE particles fill cracks and tiny thread imperfections - providing superior lubricating and sealing properties. Leak-free joints can be tested and put into service immediately. Holds tight against vibration, expansion, and contraction. Brushable; non-separating; will not run or drip from joints. Soft set; no cure time required. Withstands temperatures from -50°F to 500°F



CAT NO. DESCRIPTION:
656H010 1/2 pint
656H011 1 pint
656H510 MSDS Sheet for RealTuff

PUTTIES & EPOXIES

CREST/GOOD PUTTY

Stainless, non-bleeding, and non-crumbling. Contains germicide. Economical. Never hardens. Ideal for sealing and caulking faucets, sinks, fixtures, bowls, strainers, etc.



CAT NO. DESCRIPTION:
845-001 (14 oz.)
845-501 MSDS Sheet for Putty

STA-PUT

Plumbing sealing and caulking compound for setting plumbing fixtures, bowls, faucets, basin cocks, strainers, plugs, and sink frames. Won't stick to fingers or hands. Always the same smooth, uniform appearance from top to bottom of container with superior sealing qualities. Sta-Put will not harden, crumble, crack or shrink.



CAT NO. DESCRIPTION:
845 H 002 14 oz.
845 H 004 3 lbs
845 H 005 5 lbs
845 H 504 MSDS Sheet for StaPut

PROPOXY 20 is a fast acting, two part epoxy that easily mixes to form a permanent steel-hard bond in 20 minutes. Adheres to almost any surface with strength often greater than the materials joined. Can be drilled, filed, sanded, painted, and machined after dry. Can be applied to wet surfaces.

CAT NO. DESCRIPTION:
845 H 015 4 oz stick
845 H 515 MSDS Sheet for ProPoxy

PTFE STRING

"ZIP JOINT" is the fastest way to make a gasket or pack a valve. Seals practically everything, will form to any size or shape to make a positive seal on faucet stems, pump shafts, flanged pipe joints. Can be used in place of sheet packing on boiler inspection plates.



Temp. range: 40° to 500° F.

Pressures up to 1500 PSI under proper applications.

CAT NO. SIZE:
919 T 007 3/32" x 50' Length

PTFE TAPE

STANDARD PTFE TAPE (.3 mil)

CAT NO. SIZE:
654 T 004 1/2" x 260"
654 T 002 1/2" x 520"
654 T 003 3/4" x 520"

X-THICK PTFE TAPE (.4 mil)

CAT NO. SIZE:
654 T 012 1/2" x 520"

BLUE MONSTER PTFE TAPE

is a thicker, denser, general-purpose thread seal tape. 120' roll is 5 times longer than conventional rolls of tapes. Fewer wraps are necessary for a leak-proof seal. No waste and no re-taping make sealing joints a breeze.



CAT NO. SIZE:
654 T 009 1/2" x 1429" Blue Monster PTFE tape
654 T 010 3/4" x 1429" Blue Monster PTFE tape



HEATING AND CHEMICALS

RADIATOR CHEMS

CRYO-TEK RADIATOR ANTIFREEZE



A blend of virgin (not recycled) propylene glycol and specially formulated corrosion inhibitors for use in hydronic heating and cooling closed loop piping systems (including radiant heating systems), most solar heating systems, and general plumbing systems.

For use in systems fabricated with metal, plastics (except CPVC) and rubber piping, fittings, seals, and other parts. Corrosion inhibitors in Cryo-tek protect against corrosive build-ups within the piping loop and are effective with most metals including steel, aluminum* (up to 160°F) and copper. Non-flammable, odorless, non-toxic, and non-irritating.

CAT NO.	DESCRIPTION:
656H003	5 Gallons
656H004	55 Gallons
656H503	MSDS Sheet for Cryo-Tec

CYCLONE FIN & COIL CLEANER

High pressure aerosol degreaser and cleaner for smaller condenser coils. Blows away dirt and lint, Penetrates and removes grease. Doesn't require rinsing. Dries quickly and leaves no residue. Excellent for use on window air conditioning units. Non-flammable, nonconductive. Pleasant Odor.



CAT NO.	DESCRIPTION:
491-003	20 oz aerosol can
491-503	MSDS Sheet for Cyclone

FOAMING CLEAN-A-COIL

COIL CLEANER & BRIGHTENER
An industrial strength cleaner and brightener that is non-acid and non-fuming. Its foaming action causes it to cling to surfaces and to penetrate down to inaccessible areas. It renews condenser coils, evaporator coils, mechanical equipment, permanent, electronic air filters, etc.



CAT NO.	DESCRIPTION:
491-004	1 quart container
491-008	1 gallon container
491-503	MSDS Sheet for Foaming Cleaner

BIO SNAKE BLOCK

Bio-Snake® blocks stay in the trap and continuously release select spore form bacteria over a 30 day cycle. Unlike liquids that freely flow through any trap, the Bio-Snake® block stays in the trap working 24 hours a day. Harsh chemicals like bleaches and sanitizers do not impact performance like they do with liquids. Eliminates grease before it has a chance to decompose and become rancid. Bio-Snake® actually digests grease turning it into carbon dioxide and water.



Small Block Size: 5-40 gallon traps
Large Block Size: 80-500 gallon traps

CAT NO.	DESCRIPTION
422-005	Small Bio-Snake® block
422-006	Large Bio-Snake® block

PVC CHEMICALS



PVC CLEAR PRIMER (Red Label)
Primer for PVC pipe and fittings - All sizes and schedules. Dauber in cap. NSF listed. Conforms to ASTM F656.

CAT NO.	DESCRIPTION:
664H060	Hercules Primer (1 pint)
664H070	Hercules Primer (1 quart)

PVC CEMENT - Clear
Medium Body, Medium Set
For PVC, DWV and SW pipe and fittings up to 6" diameter, Schedule 40 and 80. Dauber in cap. NSF and UPC listed. Conforms to ASTM D2564.

CAT NO.	DESCRIPTION:
664H020	Hercules Cement (1 quart)

MULTI-PURPOSE PIPE CLEANER

CAT NO.	DESCRIPTION:
664-002	Harvey's Cleaner (8 oz.)
664-502	MSDS Sheet for Pipe Cleaner



MULTI-PURPOSE SOLVENT CEMENT

CAT NO.	DESCRIPTION:
664-001	Harvey's Cement (8 oz.)
664-501	MSDS Sheet for Pipe Cement



Notes:



LUBRICANTS

SILICONE SPRAY

100% Usable Product Stops Corrosion... Stops Squeaking & Sticking...Lubricates... Non-Flammable...Non-Corrosive.



CAT NO.	SIZE:
491-005	11 oz. Spray Can
491-505	MSDS Sheet

SILICONE SPRAY - FOOD GRADE

For use in food processing areas. Prevents food buildup and cuts clean-up time. Registered with the NSF/USDA as an H1 lubricant with incidental contact with food for use in food processing areas. Meets FDA 21 CFR requirements. Meets Calif. and OTC compliancy for industrial use. No hexane or acetone.



CAT NO.	SIZE:
491-006	11 oz. Spray Can
491-506	MSDS Sheet

"AEROKROIL" PENETRATING OIL & LUBE

An industry proven penetrating oil that has no equal. Quickly loosens rusted nuts and bolts - frees frozen shafts, pulleys, etc. Penetrates to 1 millionth inch spaces, dissolves rust, lubricates, cleans and prevents rust. The oil that creeps!



CAT NO.	SIZE:
491-002	16.5 oz.
491-502	MSDS Sheet

WD40

America's favorite penetrating oil. WD-40 protects auger and saw blades from rust and makes cutting easier. Cleans stainless steel sinks. 1001 other uses.



CAT NO.	SIZE:
491-043	3 oz.
491-040	12 oz.
491-540	MSDS Sheet

CREST/GOOD CUTTING OIL

Clear, Active Sulfurized Cutting Oil



CAT NO.	SIZE:
492-001	1 Qt. Bottle
492-501	MSDS Sheet

KEY GREASE & SILICONE GREASE

CREST/GOOD KEY GREASE



METAL SCREW-TOP CONTAINER

PLASTIC FLIP-TOP CONTAINER

White, odorless, tasteless, non-rancid formula. Won't wash off at high temperatures. Heatproof to 325°

CAT NO.	DESCRIPTION:
843-004	1/2 oz. plastic container
843-005	2 oz. metal container
843-501	MSDS Sheet for Grease

CREST/GOOD SILICONE GREASE



METAL SCREW-TOP CONTAINER

Waterproof, high-temperature dielectric grease protects as it lubricates. Long-term protection & lubrication. Heatproof to 325°

CAT NO.	DESCRIPTION:
843-008	2 oz. metal container
843-508	MSDS Sheet for Grease




HEATING AND CHEMICALS

Screws & Plugs

SELF-TAPPING SHEET METAL SCREWS

Sharp Gimlet Point for easy starting; made of case-hardened steel w/ zinc plating, auger-like thread; wide binding slotted/hex head insures positive fastening; designed for use in steel, brass, aluminum, plywood, plastics & other suitable metals.




CAT NO. / LENGTH x GAUGE:

241 I 001	3/8" x 4
241 I 003	3/8" x 6
241 I 004	1/2" x 6
241 I 005	5/8" x 6
241 I 007	1/2" x 7
241 I 008	1/2" x 8
241 I 009	5/8" x 8
241 I 010	1" x 8
241 I 011	1-1/4" x 8
241 I 012	1-1/2" x 8
241 I 013	1/2" x 10
241 I 014	3/4" x 10
241 I 015	1" x 10
241 I 016	1-1/4" x 10
241 I 017	1-1/2" x 10

SCREW/ANCHOR ASSORTMENT KIT

Contains 100 Self Tapping Screws with 100 Conical Anchors and one 1/4" masonry drill bit. Packaged in a sturdy snap-lock box with tab for hanging.



CAT NO.	DESCRIPTION
241 I 091	1" x 10 Screws & Anchors

TOGGLE BOLTS

Cadium Plated Steel Screw



CAT NO.	SIZE	LENGTH
361 E 004	1/4"	4" Round Head

SELF TAPPING BOILER PLUGS (with washer)

CAT NO.	SIZE
791 I 004	7/16"



E-Z FIX BOILER PLUG

Spring Loaded Toggle Type Boiler Repair Plug, Full 1-3/4" Diameter for Extra Large Coverage.



CAT NO.
792 I 002

POW-R WRAP

A MUST HAVE for the shop. Specially formulated fiberglass tape designed to repair PVC, cast iron, galvanized, and clay lines, sewer lines, and anything else that supports fluids. Supports up to 300 PSI by maintaining a pure vacuum. Works from 800° F to -60°F.



CAT NO.	SIZE
252 I 011	(2" X 60")
252 I 012	(3" X 108")

LOCTITE®

LOCTITE RETAINING COMPOUND

680 series: (Hard locking)
.015 in gap fill; 4000 psi shear strength. Temp. Range: -65.0° - 300°f



222 series: (Medium locking)
For the locking and sealing of fasteners which Require easy disassembly with standard hand tools. Recommended for use with fasteners less than 1/4" diameter.

CAT NO.	DESCRIPTION:
644-112	Loctite 680 (10 ml)
644-113	Loctite 222MS (.5ml)
644-501	MSDS Sheet for Loctite 680
644-513	MSDS Sheet for Loctite 222MS

HAND CLEANERS

HERCULES™ HAND WIPES

Anti-bacterial hand cleaning towels for plumbers, with aloe vera, lanolin and vitamin E. Removes paints, lubricants, grease, adhesives, oil, grime, caulks, flux and plastic pipe cement.



70 Shred Proof
12" x 10" towels per tub.

CAT NO.	DESCRIPTION
664H003	Hand wipes
664H503	MSDS sheet

ORANGE HAND CLEANER

Orange scented hand Cleaner includes pumice particles and is fortified with Lanolin, Jojoba, Vitamin E, and even Aloe Vera



Handy pump on top of bottle.


CAT NO.	DESCRIPTION:
531 G 010	One gallon Container

SOAP DISPENSERS AND REFILLS



CAT. NO.	DESCRIPTION:
949B150	Sanitizer Dispenser
949B151	Soap Dispenser
949B153	Foam Dispenser
455-001	Sanitizer refill (box)
455-002	Gojo Soap refill (box)
455-003	Foam refill (plastic jug)

Notes:



PACKING

CREST/GOOD CANDLE WICKING


Long Fibre from Sea Island, Ga. Cotton



CAT NO.	TYPE	DESCRIPTION
917 Q 001	AA Fine	12 Strands
917 Q 002	B Coarse	7 Strands

GRAPHITE DACRON STRING FOR STEM PACKING

Used on water, steam, air or oil valves. Contains no asbestos.

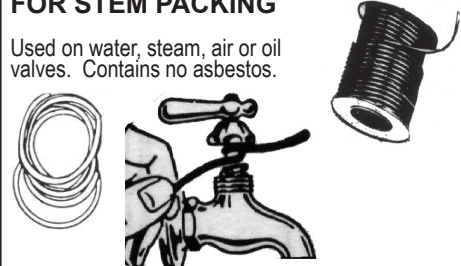

CAT NO.	SIZE	LENGTH.
918 G 050	1/8"	12 Ft.
918 G 051	1/4"	8 Ft.
918 G 101	1/8"	24 inches

RED LOCOMOTIVE SHEET PACKING (GASKET MATERIAL)




CAT NO.	THK.	SIZE:
911 R 001	1/16"	3' X 3'
911 R 002	3/32"	3' X 3'

911 R 301	1/16"	1' X 3'
911 R 302	3/32"	1' X 3'

BLACK SHEET PACKING

Reinforced with cloth

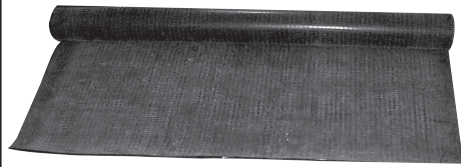

CAT NO.	THK.	SIZE:
912 R 001	1/16"	3' X 3'
912 R 002	3/32"	3' X 3'
912 R 003	1/8"	3' X 3'

(Sold by the yard only)



HEATING AND CHEMICALS

RADIATOR TOOLS, PARTS, AND ACCESSORIES

FLOAT TYPE (HOT WATER)

Solid plastic float that can never waterlog as 2 piece copper floats do. Vents that are under maximum pressures when competitive vents stop venting at low pressures.


CAT NO.
876 C 001



RADIATOR AIR VALVE

Manual Wood Wheel Type


CAT NO.
871 C 002



RADIATOR AIR VALVES


For Hot Water. Chrome.

CAT NO. TYPE:
875 C 001 No. 1 Keyless
875 C 002 No. 2 Key Type

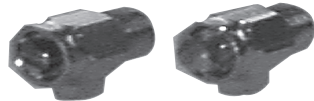

RADIATOR SPUD FIT-ALL WRENCH

CAT NO.
591 I 189



AIR VALVE KEY

Hang it Screwdriver

CAT NO.
875 C 003



Key Function

ICE MACHINE CHEMICALS

ICE MACHINE CLEANER will remove scale build-up from ice machine systems, allowing for longer operational life. No fumes, no chlorides. Safe on stainless steel.

Note: Use Nickel Safe (below) when nickel components are present in a system.

CAT NO. DESCRIPTION:
667-010 16 oz. Ice Machine Cleaner
667-510 MSDS sheet



NICKEL SAFE is a food grade acid cleaner that removes scale, slime and deposits from ice machines to ensure clean, cold and taste free ice. USDA authorized. Safe on nickel or tin plated evaporators.

CAT NO. SIZE DESCRIPTION:
667-011 16 oz. Nickel Safe Cleaner
667-501 MSDS sheet

ICE MAN SANITIZER is a premium product that removes scale build-up from ice machine systems, allowing for longer operational life. The sanitizer makes a system safe and odor free by killing bacteria and disinfecting the system. EPA authorized. Eliminates odors and bacteria.

Note: Use Nickel Safe (above) when nickel components are present in a system.

CAT NO. SIZE DESCRIPTION:
667-012 16 oz. Ice Man Sanitizer
667-512 MSDS sheet



CONDENSATE PAN PILLS

Pan Pills clean and prevents scale, corrosion, clogging and objectionable odors from forming in condensate drain pans and humidifiers. Non-corrosive, biodegradable, and safe on all plastic and metal surfaces.

- Prevents scale & odors
- Prevents corrosion
- Remain active for up to 3 months
- Environmentally safe

CAT NO. DESCRIPTION:
422-007 120 pill bottle
422-507 MSDS Sheet for Condensate Pills



RADIATOR SPUD KEY

Case Hardened Key Extracts Radiator Spuds From Cast Iron Radiators

CAT NO. SIZE
591 I 182 3/4" Key
591 I 183 1" Key




3 IN 1 RADIATOR TOOL
3 tools in one: Extractor for removing broken spuds; tap for re-cutting new threads, and die for rethreading.



CAT NO.
591 I 066

PTFE VALVE DISCS

For Jenkins, Luckenheimer, Crane, Walworth, Kennedy and Other Valves. The finest valve discs for long lasting and trouble-free service on hot water, steam, caustic and acid lines. Chemically inert; they will withstand temperatures from -300° to 500° and withstand pressures up to several thousand pounds, and won't react with acids.

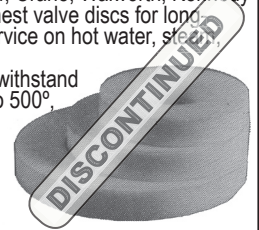

CAT NO.	SIZE	O.D.	I.D.	THK.
863 T 002	3/8"	25/32"	1/4"	7/32"
863 T 003	1/2"	13/16"	1/4"	1/4"

DISINFECTANTS

SANIGUARD DISINFECTANT FOGGER & SPRAY

Sanitize An Entire Room in 15 Minutes!

The world's first patented and extensive tested product that enables you to sanitize entire rooms in just minutes with the same kill-on-contact power of the conventional SaniGuard® mops.

(One 8oz fogger treats up to 200 sq. ft.; the 3oz fogger treats up to 155 sq. ft. both have a 36-month shelf life.)

CAT NO. DESCRIPTION:
667-111 3 oz. Fogger (discontinued)
667-112 8 oz. Fogger (discontinued)
667-113 10 oz. Spray (discontinued)
667-511 MSDS for Saniguard



ENZYMATIC URINAL BLOCKS

- Cleans with every flush - contains powerful surfactants and chelating agents.
- Each block lasts up to 2,000 flushes.
- Eliminates odors - billions of select bacterial spores digest odors.
- Lets you know its cleaning - colors the water with every flush.



CAT NO. DESCRIPTION:
422-008 Pack of 12 blocks
422-508 MSDS for Urinal Blocks

TRAP SEAL

- TRAP SEAL is a specially engineered liquid that seals drain traps to prevent odors and preserves a sanitary "septic seal". Prevents sewer gases and odors from entering from trap.
- Use whenever traps dry out, are not in use, are in remote areas, or where odors are a problem.
- It's tenacious. It won't be flushed out of drain easily.

Use for:
• Floor, sink, & shower drains • Toilets & urinals • Water fountains • Condensate drains
• TRAP SEAL is concentrated and ready-to-use directly from its quart container.

CAT NO. DESCRIPTION:
432-003 1 quart bottle
432-503 MSDS for Trap Seal



Crest/Good Mfg. Co., Manufacturers of Quality Plumbing & Heating Specialties & Brass Since 1896
90 Gordon Drive, Syosset, NY 11791 • East./Central Phone: 1-800-645-1251 • Mtn./Pacific Phone: 1-800-862-7378

HEATING AND CHEMICALS

GORILLA GLUE

Gorilla Glue is an interior/exterior adhesive ideal for most building projects and fixes: furniture repair, woodworking, project assembly, and general repairs.

Use it to bond stone, wood, tile, metal brick, ceramic, foam board, fiberglass, and much more.

Gorilla Glue is 100% waterproof. Originally used to bond Polynesian teak wood furniture, it has been a staple in the Norwegian boat building industry for years.



CAT NO.	DESCRIPTION
656G003	2 oz (white quick cure style)
656G004	2 oz
656G005	4 oz
656G006	8 oz
656G503	MSDS Sheet for Gorilla Quick Cure
656G504	MSDS Sheet for Gorilla Glue

GORILLA SUPER GLUE

The only super glue tough enough to be called Gorilla. This new super glue has Impact-Tough™ Formula, which makes a bond that's impact-resistant. It sets in under a minute, with no clamping required. Projects dry fast and last long, standing up to drops, bumps and bangs.

- Unique rubber particles increase impact-resistance.
- Anti-clog tip with metal pin keeps nozzle clean.
- Thick formula flows better for improved control.
- Dries in just 30-60 seconds, with no clamping.
- Use on wood, plastic, glass, metal, ceramics & more!



CAT NO.	DESCRIPTION
656G008	2 X 3gram tubes
656G009	15 gram bottle (shown)
656G503	MSDS Sheet for Gorilla Super Glue

GORILLA TAPE



- 1 Tough All Weather Shell**
- 2 Strong Reinforced Backing**
- 3 Triple Thick Adhesive**

Twice as thick and three times the adhesive as regular duct tape. Sticks to practically anything!

CAT NO.	DESCRIPTION
656 G 001	Black large roll (2" x 35 yards)
656 G 002	Black small roll (2" x 12 yards)
656 G 010	Clear tape (1.88" x 27')
656 G 503	MSDS Sheet for Gorilla Tape



Gorilla Clear Repair is the toughest and clearest solution for almost any repair. **Gorilla Clear Repair** allows you to fix, patch, seal, hold, and protect almost any surface. Won't yellow outdoors. Water, UV & temp resistant. Notched edge design. Sticks to rough and uneven surfaces.



What makes Gorilla Glue so great?

Gorilla Glue Is...	And this means that...
100% Waterproof	Gorilla Glue can truly be used indoors and outdoors, is unaffected by changes in temperature and will not break down when exposed to rain, sun or snow.
Incredibly Strong and Versatile	Gorilla Glue is pure polyurethane glue. It contains no additives or solvents giving a much stronger bond and allowing different materials to be glued together.
Stainable and Paintable	Gorilla Glue leaves an invisible glue line that can be sanded, painted and stained. Finishing has never been easier!
Easily Sanded	Gorilla Glue will not gum up sandpaper or dull cutting tools. It is easily sanded.
More Coverage	Gorilla Glue expands 3 to 4 times its size, so you only need to apply a small amount to one surface.
A Long Open Working Time	Gorilla Glue has an open working time of 20 minutes giving you plenty of time to set your project in perfect place.
Dries Light Tan	Gorilla Glue goes on dark but dries to a light tan color.
Non-toxic	Gorilla Glue is completely non-toxic when cured. It is free of solvents and fillers. It contains no carcinogens and does not release fumes when either liquid or dry.
Acid-Free	Gorilla Glue is completely free of any acids because it is 100% polyurethane glue. Gorilla Glue has a neutral pH level.

MR. STICKY'S UNDERWATER GLUE

Use Mr. Sticky's® Underwater Glue for most materials **except** surfaces which contain teflon, silicone, polypropylene or polyethylene.

Sticks extremely well to PVC, vinyl, hypalon® and even polyurethane inflatable boats!

- Remains flexible.
- Can stretch over 100% without breaking!
- Can be easily applied & bonded underwater.
- 24 hour curing time needed before pressurization.

CAT NO.	DESCRIPTION
656G007	30 Gram dispenser
656G507	MSDS Sheet for Underwater Glue



DUCT TAPE

- Cloth reinforced
- 2" x 60' roll
- 10' longer than other rolls

CAT. NO.
656 G 000

